


## LED Wall Mounts

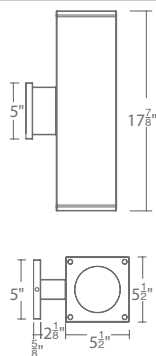

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

### SPECIFICATIONS

<b>Input:</b>	Universal voltage 120V - 277VAC, 50/60Hz
<b>Dimming:</b>	Electronic low voltage (ELV) : 100% - 5% 0-10V: 100% - 1%
<b>Light Source:</b>	High output 3 Step Mac Adam Ellipse COB Rated life of 60,000 hours at L70
<b>Finish:</b>	Electrostatically powder coated, white, black, bronze and graphite
<b>Standards:</b>	IP65 rated, UL & cUL wet location listed Title 24 JA8-2016 Compliant
<b>Operating Temp:</b>	-13°F to 122°F (-25°C to 50°C)

### ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Reference Output <sup>1</sup>			Light Distribution	Finish	
						Lumen	CBCP	Efficacy (lm/w)			
DC-WD06	6" 35W x 2	<b>S</b> Straight up and down	16°	<b>927S</b>	2700K	90	2820 x 2	18842 x 2	81 x 2		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
				<b>827S</b>	2700K	85	3385 x 2	22608 x 2	97 x 2		
				<b>930S</b>	3000K	90	2925 x 2	19543 x 2	84 x 2		
				<b>830S</b>	3000K	85	3535 x 2	23632 x 2	101 x 2		
				<b>835S</b>	3500K	85	3630 x 2	24255 x 2	104 x 2		
				<b>840S</b>	4000K	85	3665 x 2	24490 x 2	105 x 2		
		<b>N</b> Straight up and down	28°	<b>927S</b>	2700K	90	2800 x 2	7992 x 2	80 x 2		
				<b>827S</b>	2700K	85	3360 x 2	9589 x 2	96 x 2		
				<b>930S</b>	3000K	90	2900 x 2	8290 x 2	83 x 2		
				<b>830S</b>	3000K	85	3510 x 2	10024 x 2	100 x 2		
				<b>835S</b>	3500K	85	3600 x 2	10288 x 2	103 x 2		
				<b>840S</b>	4000K	85	3635 x 2	10388 x 2	104 x 2		
		<b>F</b> Straight up and down	38°	<b>927S</b>	2700K	90	2825 x 2	5451 x 2	81 x 2		
				<b>827S</b>	2700K	85	3390 x 2	6540 x 2	97 x 2		
				<b>930S</b>	3000K	90	2930 x 2	5654 x 2	84 x 2		
<b>830S</b>	3000K			85	3545 x 2	6836 x 2	101 x 2				
<b>835S</b>	3500K			85	3640 x 2	7017 x 2	104 x 2				
<b>840S</b>	4000K			85	3675 x 2	7085 x 2	105 x 2				
DC-WD0644	6" 22W x 2	<b>F</b> Away from the wall	N/A	<b>927A</b>	2700K	90	2860 x 2	N/A	82 x 2		
				<b>827A</b>	2700K	85	3435 x 2	N/A	98 x 2		
				<b>930A</b>	3000K	90	2970 x 2	N/A	85 x 2		
				<b>830A</b>	3000K	85	3590 x 2	N/A	103 x 2		
				<b>835A</b>	3500K	85	3685 x 2	N/A	105 x 2		
				<b>840A</b>	4000K	85	3720 x 2	N/A	106 x 2		
<b>F</b> Towards the wall	N/A	<b>927B</b>	2700K	90	2860 x 2	N/A	82 x 2				
		<b>827B</b>	2700K	85	3435 x 2	N/A	98 x 2				
		<b>930B</b>	3000K	90	2970 x 2	N/A	85 x 2				
		<b>830B</b>	3000K	85	3590 x 2	N/A	103 x 2				
		<b>835B</b>	3500K	85	3685 x 2	N/A	105 x 2				
		<b>840B</b>	4000K	85	3720 x 2	N/A	106 x 2				
<b>F</b> One side each	N/A	<b>927C</b>	2700K	90	2860 x 2	N/A	82 x 2				
		<b>827C</b>	2700K	85	3435 x 2	N/A	98 x 2				
		<b>930C</b>	3000K	90	2970 x 2	N/A	85 x 2				
		<b>830C</b>	3000K	85	3590 x 2	N/A	103 x 2				
		<b>835C</b>	3500K	85	3685 x 2	N/A	105 x 2				
		<b>840C</b>	4000K	85	3720 x 2	N/A	106 x 2				

**DC-WD06-** \_\_\_\_\_ - \_\_\_\_\_ Example: **DC-WD06-F930A-WT** <sup>1</sup>Reference output shows 35W output. Multiply by 0.7 to determine output for 22W combinations.

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760