

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52307 7"	3000K 90	AB Aged Brass	9.5W	777	588	Yes
	3000K 90	BN Brushed Nickel	9.5W	777	588	Yes
	3000K 90	WT White	9.5W	777	588	Yes

Example: **PD-52307-AB**

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
Rated Life:	70000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS

- RPL-GLA-52307 - Glass for PD-52307
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish




FINISHES

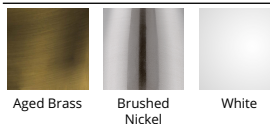

Aged Brass Brushed Nickel White

LINE DRAWING

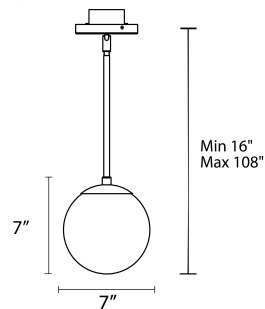

PD-52307

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52310 10"	3000K 90	AB Aged Brass	13.9W	905	685	Yes
	3000K 90	BN Brushed Nickel	13.9W	905	685	Yes
	3000K 90	WT White	13.9W	905	685	Yes

Example: **PD-52310-AB**

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
Rated Life:	70000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS


- RPL-GLA-52310 - Glass for PD-52310
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish



FINISHES

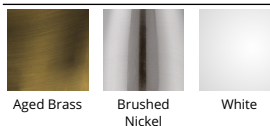

LINE DRAWING

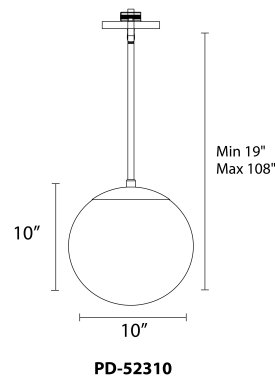

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52313 13"	3000K 90	AB Aged Brass	14.1W	907	715	Yes
	3000K 90	BN Brushed Nickel	14.1W	907	715	Yes
	3000K 90	WT White	14.1W	907	715	Yes

Example: **PD-52313-AB**

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
Rated Life:	70000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52313 - Glass for PD-52313
 RPL-ROD-IN06-BB - 6" rod - AB finish
 RPL-ROD-IN12-BB - 12" rod - AB finish
 RPL-ROD-IN06-BN - 6" rod - BN finish
 RPL-ROD-IN12-BN - 12" rod - BN finish
 RPL-ROD-IN06-WT - 6" rod - WT finish
 RPL-ROD-IN12-WT - 12" rod - WT finish



FINISHES

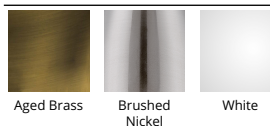

Aged Brass

Brushed Nickel

White

LINE DRAWING

