

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Copa Indoor/Outdoor Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-W55809 9"	3000K 90	BK/GR Black/Gold Ribbed	17W	853	403	Yes
	3000K 90	WT/GR White/Gold Ribbed	17W	853	403	Yes

Example: **PD-W55809-BK/GR**

### DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

### FEATURES

- Smooth round exterior with weather-resistant finish, contrast ribbing on interior
- Three 12" and one 6" downrods included (additional rods available)
- Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
- Driver concealed within the fixture
- 5 year warranty

### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly, Wet Location Listed
Construction:	Aluminum body with silk screen glass diffuser

### REPLACEMENT PARTS


- RPL-RDOU06-886-BK - 6" rod - BK finish
- RPL-RDOU12-886-BK - 12" rod - BK finish
- RPL-GLA-W55809 - Glass for PD-W55809
- RPL-RDOU06-886-WT - 6" rod - WT finish
- RPL-RDOU12-886-WT - 12" rod - WT finish



### FINISHES



### LINE DRAWING

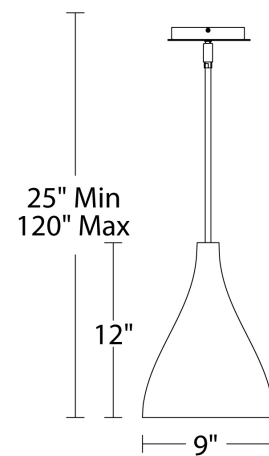

**PD-W55809**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Copa Indoor/Outdoor Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-W55813 13"	3000K 90	BK/GR Black/Gold Ribbed	18W	1201	620	Yes
	3000K 90	WT/GR White/Gold Ribbed	18W	1201	620	Yes

Example: **PD-W55813-BK/GR**

### DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

### FEATURES

- Smooth round exterior with weather-resistant finish, contrast ribbing on interior
- Three 12" and one 6" downrods included (additional rods available)
- Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
- Driver concealed within the fixture
- 5 year warranty

### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly, Wet Location Listed
Construction:	Aluminum body with silk screen glass diffuser

### REPLACEMENT PARTS


- RPL-RDOOUT06-886-BK - 6" rod - BK finish
- RPL-RDOOUT12-886-BK - 12" rod - BK finish
- RPL-GLA-W55813 - Glass for PD-W55813
- RPL-RDOOUT06-886-WT - 6" rod - WT finish
- RPL-RDOOUT12-886-WT - 12" rod - WT finish



### FINISHES



### LINE DRAWING

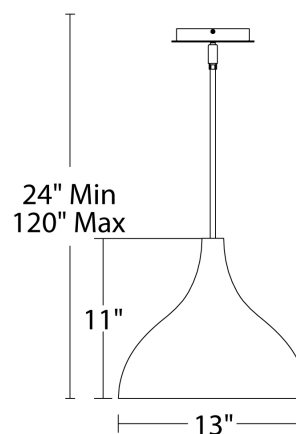

**PD-W55813**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Copa

### Indoor/Outdoor Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-W55817 17"	3000K 90	BK/GR Black/Gold Ribbed	19W	1344	677	Yes
	3000K 90	WT/GR White/Gold Ribbed	19W	1344	677	Yes

Example: **PD-W55817-BK/GR**

#### DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

#### FEATURES

- Smooth round exterior with weather-resistant finish, contrast ribbing on interior
- Three 12" and one 6" downrods included (additional rods available)
- Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

<b>Color Temp:</b>	3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 5%
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly, Wet Location Listed
<b>Construction:</b>	Aluminum body with silk screen glass diffuser

#### REPLACEMENT PARTS


- RPL-RDOOUT06-886-BK - 6" rod - BK finish
- RPL-RDOOUT12-886-BK - 12" rod - BK finish
- RPL-GLA-W55813 - Glass for PD-W55817
- RPL-RDOOUT06-886-WT - 6" rod - WT finish
- RPL-RDOOUT12-886-WT - 12" rod - WT finish



#### FINISHES



#### LINE DRAWING

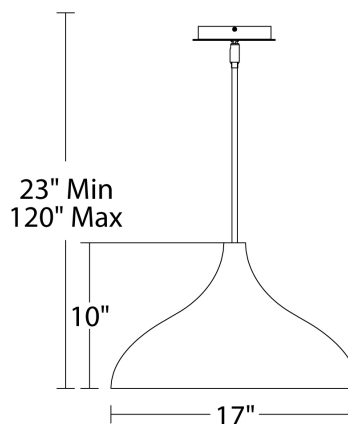

**PD-W55817**