

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52307 7"	3000K 90	AB Aged Brass	9.5W	777	588	Yes
	3000K 90	BN Brushed Nickel	9.5W	777	588	Yes
	3000K 90	WT White	9.5W	777	588	Yes

Example: **PD-52307-AB**

### DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

### FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
<b>Construction:</b>	Aluminum hardware with opal glass diffuser

### REPLACEMENT PARTS

- RPL-GLA-52307 - Glass for PD-52307
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish



### FINISHES

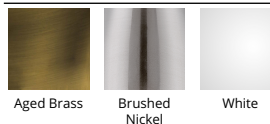


Aged Brass

Brushed Nickel

White

### LINE DRAWING

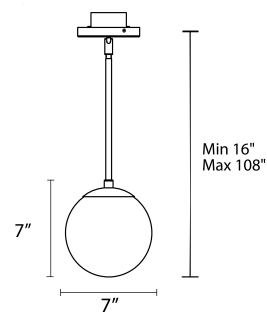

PD-52307

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52310 10"	3000K 90	AB Aged Brass	13.9W	905	685	Yes
	3000K 90	BN Brushed Nickel	13.9W	905	685	Yes
	3000K 90	WT White	13.9W	905	685	Yes

Example: **PD-52310-AB**

### DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

### FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
<b>Construction:</b>	Aluminum hardware with opal glass diffuser

### REPLACEMENT PARTS


- RPL-GLA-52310 - Glass for PD-52310
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish



### FINISHES

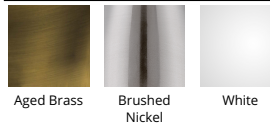

### LINE DRAWING

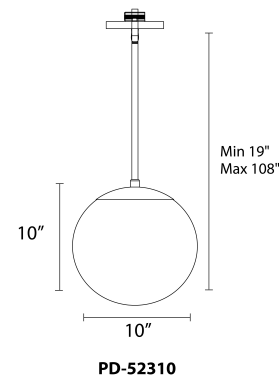

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Niveous Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52313 13"	3000K 90	AB Aged Brass	14.1W	907	715	Yes
	3000K 90	BN Brushed Nickel	14.1W	907	715	Yes
	3000K 90	WT White	14.1W	907	715	Yes

Example: **PD-52313-AB**

### DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

### FEATURES

- Mouth blown etched opal glass provides even illumination
- Integral swivel for sloped ceilings
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%, 0-10V: 100 - 5%, ELV: 100 - 5%
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard.
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
<b>Construction:</b>	Aluminum hardware with opal glass diffuser

### REPLACEMENT PARTS

- RPL-GLA-52313 - Glass for PD-52313
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish



### FINISHES

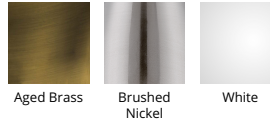

### LINE DRAWING

