


# TUBE ARCHITECTURAL DS-WD05

# WAC LIGHTING

## LED Wall Mounts

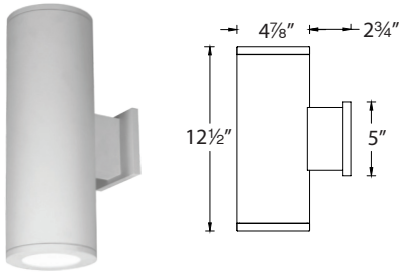

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

### SPECIFICATIONS

**Input:** Universal voltage 120V - 277VAC, 50/60Hz  
**Dimming:** Electronic low voltage (ELV) : 100% - 5%  
 0-10V: 100% - 1%  
**Light Source:** High output 3 Step Mac Adam Ellipse COB  
 Rated life of 60,000 hours at L70  
**Finish:** Electrostatically powder coated, white, black, bronze and graphite IP65 rated, ETL & cETL wet location listed  
**Standards:** Title 24 JA8-2016 Compliant  
**Operating Temp:** -13°F to 122°F (-25°C to 50°C)

### ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color	Temp	CRI	Reference Output <sup>1</sup>		Efficacy (lm/w)	Light Distribution	Finish
							Lumen	CBCP			
DS-WD05	5" 25W x2	S Straight up and down	16°	927S	2700K	90	1825 x 2	10050 x 2	73 x 2		
				27S	2700K	85	2190 x 2	12057 x 2	88 x 2		
				930S	3000K	90	1895 x 2	10427 x 2	76 x 2		
				30S	3000K	85	2300 x 2	12644 x 2	92 x 2		
				35S	3500K	85	2350 x 2	12937 x 2	94 x 2		
				40S	4000K	85	2375 x 2	13062 x 2	95 x 2		
	5" 17W x2	N Straight up and down	25°	927S	2700K	90	1810 x 2	5280 x 2	72 x 2		
				27S	2700K	85	2170 x 2	6335 x 2	87 x 2		
				930S	3000K	90	1880 x 2	5478 x 2	75 x 2		
				30S	3000K	85	2275 x 2	6643 x 2	91 x 2		
				35S	3500K	85	2330 x 2	6797 x 2	93 x 2		
				40S	4000K	85	2350 x 2	6863 x 2	94 x 2		
	5" 17W x2	F Straight up and down	33°	927S	2700K	90	1900 x 2	4515 x 2	76 x 2		
				27S	2700K	85	2280 x 2	5417 x 2	91 x 2		
				930S	3000K	90	1970 x 2	4685 x 2	79 x 2		
30S				3000K	85	2390 x 2	5681 x 2	96 x 2			
35S				3500K	85	2445 x 2	5812 x 2	98 x 2			
40S				4000K	85	2470 x 2	5870 x 2	99 x 2			
DS-WD0534	5" 17W x2	F Away from the wall	N/A	927A	2700K	90	2000 x 2	N/A	80 x 2		
				27A	2700K	85	2400 x 2	96 x 2			
				930A	3000K	90	2075 x 2	83 x 2			
				30A	3000K	85	2520 x 2	101 x 2			
				35A	3500K	85	2575 x 2	103 x 2			
				40A	4000K	85	2600 x 2	104 x 2			
	5" 17W x2	F Towards the wall	N/A	927B	2700K	90	2000 x 2	N/A	80 x 2		
				27B	2700K	85	2400 x 2	96 x 2			
				930B	3000K	90	2075 x 2	83 x 2			
				30B	3000K	85	2520 x 2	101 x 2			
				35B	3500K	85	2575 x 2	103 x 2			
				40B	4000K	85	2600 x 2	104 x 2			
5" 17W x2	F One side each	N/A	927C	2700K	90	2000 x 2	N/A	80 x 2		One side away from wall, one side towards the wall	
			27C	2700K	85	2400 x 2	96 x 2				
			930C	3000K	90	2075 x 2	83 x 2				
			30C	3000K	85	2520 x 2	101 x 2				
			35C	3500K	85	2575 x 2	103 x 2				
			40C	4000K	85	2600 x 2	104 x 2				

<b>BK</b>	Black	
<b>WT</b>	White	
<b>BZ</b>	Bronze	
<b>GH</b>	Graphite	

DS-WD05-\_\_\_\_\_ - \_\_\_\_\_ Example: DS-WD05-F930A-WT <sup>1</sup>Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations.

wacighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760