

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Lotos

### Adjustable Downlight 3000K

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ERAR	W 45°	930 3000K - 90	530		WT White

Example: **R2ERAR-W930-WT**

#### FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

#### SPECIFICATIONS

<b>Color Temp:</b>	3000K
<b>Input:</b>	120 -277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-5%, TRIAC: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Heavy gauge retention clips secures fixture to ceiling
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2016 Compliant, Energy Star 2.0 Wet Location Listed
<b>Construction:</b>	Steel with frosted TIR lens





#### FINISHES



White

#### LINE DRAWING

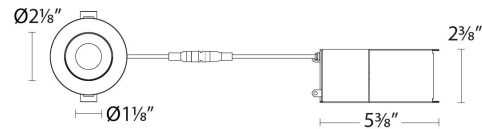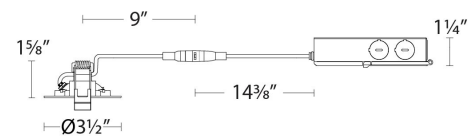

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Lotos

### Adjustable Downlight 3000K

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR	W 45°	930 3000K - 90	530		WT White

Example: **R2ESAR-W930-WT**

#### FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




#### FINISHES



White

#### LINE DRAWING

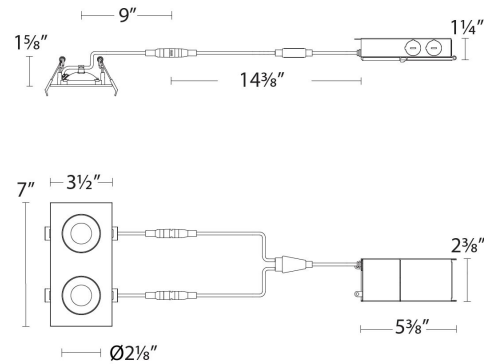

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Lotos

### Adjustable Downlight 3000K

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR-2	W 45° x 2	930 3000K - 90	530 x 2		WT White

Example: **R2ESAR-2-W930-WT**

#### FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




#### FINISHES



White

#### LINE DRAWING

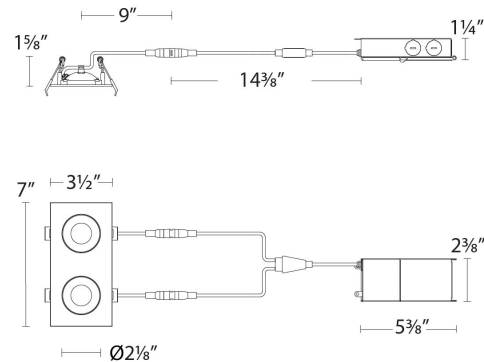

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Lotos

### Adjustable Downlight 3000K

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R2ESAR-3	W 45° x 3	930 3000K - 90	530 x 3		WT White

Example: **R2ESAR-3-W930-WT**

#### FEATURES

- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 -277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



#### FINISHES



White

#### LINE DRAWING

