

WAC LIGHTING

Lotos Adj - Fire Rated

Adjustable Downlight 5CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4ERAR	W 45	9CS 2700K/3000K/3500K/4000K/5000K - 90	800	No	FWT White (Fire Rated)

Example: **R4ERAR-W9CS-FWT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

- Fire Rated - ASTM E119 and UL 263 tested and certified for 2 hours
- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Minimum Plenum Space Required: 4 1/2"
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



FINISHES:

White
(Fire Rated)

LINE DRAWING:

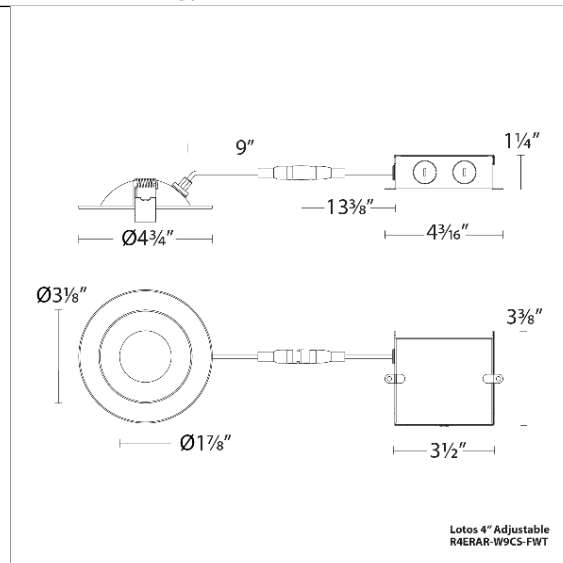

WAC LIGHTING

Lotos Adj - Fire Rated

Adjustable Downlight 5CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R6ERAR	W 45	9CS 2700K/3000K/3500K/4000K/5000K - 90	1320	No	FWT White (Fire Rated)

Example: **R6ERAR-W9CS-FWT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

- Fire Rated - ASTM E119 and UL 263 tested and certified for 2 hours
- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Minimum Plenum Space Required: 4 1/2"
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



FINISHES:

White
(Fire Rated)

LINE DRAWING:

