

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Rubix

### Single & Double Wall Mount 3000K

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish   |
|--------------|------------------|------|--------|--|
| WS-W2504     | 3000K 90         | 16W  | 750    | AL Brushed Aluminum                              |
| WS-W2505     | 3000K 90         | 30W  | 1400   | BK Black<br>BZ Bronze<br>GH Graphite<br>WT White |

Example: **WS-W2504-AL**

#### DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with a square profile, this version of Rubix mounts upwards or downwards.

#### FEATURES


- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS


|                        |  |
|------------------------|--|
| <b>Construction:</b>   | Die-cast Aluminum  |
| <b>Power:</b>          | 30W, 16W   |
| <b>Input:</b>          | 120-277 VAC, 50/60Hz   |
| <b>Dimming:</b>        | ELV: 100-15%, 0-10V: 100-10%   |
| <b>Light Source:</b>   | Integrated LED   |
| <b>Rated Life:</b>     | 70000 Hours  |
| <b>Mounting:</b>       | Mounts directly to junction box, Can be mounted on wall in all orientations      |
| <b>Finish:</b>         | Electrostatically Powder Coated White, Bronze, Black, Brushed Aluminum, Graphite |
| <b>Operating Temp:</b> | -40°F to 122°F (-40°C to 50°C)   |
| <b>Standards:</b>      | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8-2016 Compliant                |



#### FINISHES

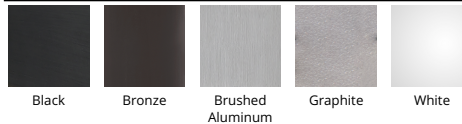

#### LINE DRAWING

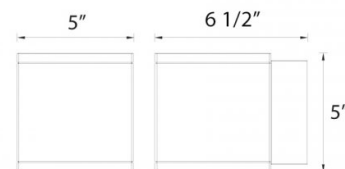

WS-W2504, WS-W2505