

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Tusk

Mini Pendant 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-29425 25"	2700K	BK Black	15 W	1350	720
	3000K	BN Brushed Nickel	15 W	1350	720
	3500K		15 W	1350	720
	4000K		15 W	1350	720

Example: **PD-29425-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Deconstructed. Offset curves lined with soft LED illumination are mounted on a round backplate, creating a strong visual presence in modern rooms.

FEATURES

- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	4000K,2700K,3500K,3000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicone diffuser




FINISHES:



Black

Brushed
Nickel

LINE DRAWING:

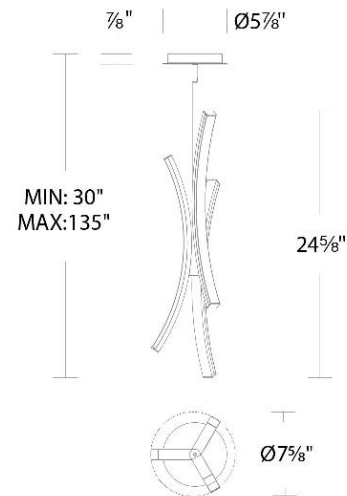

PD-29425

